

SClock 4-80-XB

Procontrol SimpleClock ipari óra

1980-19



SClock 4-80-F-XB-G



SClock 4-80-V-XB-EXT

Az SClock 4-80-XB típusú óra egyszerű digitális fali óra, extrabright erős fényű led kijelzővel, óó:pp, vagyis 4 karakteren óra és perc kijelzéssel. A számok magassága 80 mm.

Rendkívül pontosan jár a beépített nagy pontosságú kristály oszcillátornak köszönhetően. Az idő a készüléken levő nyomógombokkal állítható be.

Fényereje 3 fokozatban állítható.

Ébresztőóráként is használható.

Önálló irodai, vagy lakás órának javasoljuk.

Tápellátás: USB kábel (5V-os USB tápegységet kínálunk hozzá)



Az SClock az *Economy* család tagja. A Procontrol ClockNet Professzionális órarendszerének extra szolgáltatásai ennél a típusnál nem elérhetők. Ha az igény az abszolút pontos időszerver csatolása, garantált téli/nyári időszámítás átállítás, számítógépes adatkapcsolat, visszaszámlálás, szünetjelzés funkciók, ezen funkciókra jelen eszköz helyett ajánljuk a Procontrol *ClockNet Professzionális* órarendszeréből válasszon.

Alaptípusai:

- **SClock 4-80-F-XB:** üveglőlapos beltéri fehér változat, 4 számjegy, 80mm-es számokkal, fehér szín, extra nagy fényerő. Mérete: 325 x 146 x 32 mm
- **SClock 4-80-V-XB-EXT:** zárt tokozású kültéri vörös változat, 4 számjegy, 80mm-es számokkal, vörös szín, extra nagy fényerő. Mérete: 290 x 130 x 35 mm

Opciók:

Beltéri és kültéri kivitelben rendelhető.


Az alapértelmezett vörös szín (-V) helyett opcionálisan fehér (-F) vagy kék (-K) színű számokkal is elérhető.



Main Functions

- Two display modes: 1). Display time only; 2). Time, Date, Temperature cycle display
- Brightness mode adjustable: 1). Three levels of automatic sensitivity; 2). Three levels of manual brightness adjustment; 3). Can turn off the display; 4). Four levels of sensitive in sleep mode
- Memory mode: 1). Install the battery 2032, no power memory go away; 2). Without battery and power, remember the latest clock and various mode settings
- Alarm functions: 1). Snooze Mode; 2). Single/double weekend/daily alarm

Do not block the sensor window

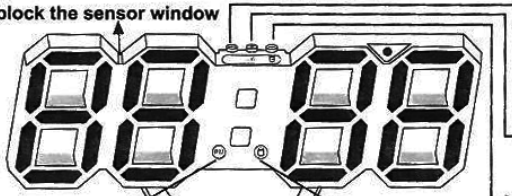


The name and function of each part

- “SET”: for comprehensive settings
 - “+”: setting mode - upgrading; non-setting mode - tap to adjust brightness, press and hold (3 secs) the button to switch display mode
 - “-”: setting mode - down; non-setting mode - tap to turn on / off alarm clock, press and hold (3 secs) the button to enter the alarm clock setting mode
 - 12-hour p.m. indicator light
 - Alarm indicator light
- Long press mentioned in the text means that holding for 3 secs

Comprehensive Settings

1. General setting:

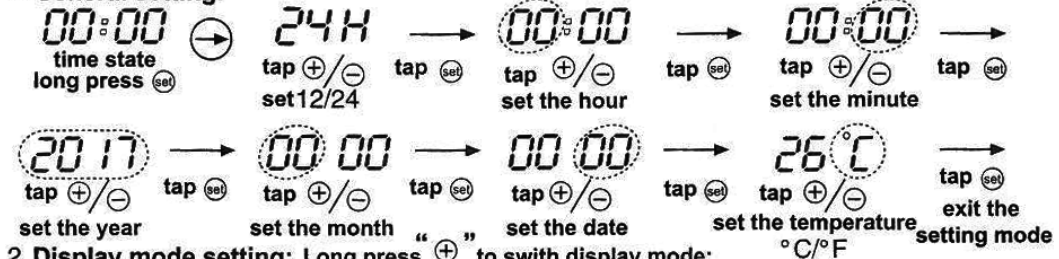

2. Display mode setting: Long press “+” to switch display mode:


- Display time only; 2). Time, Date, Temperature cycle display

- Brightness mode setting: Tap “+”, “L-5L” four speed sensitive in sleep mode; “L-AU” three levels of automatic sensitivity; “L-01” first brightness; “L-02” second brightness; “L-03” third brightness; turn off the display, such a cycle operation.

Alarm Settings

- Switch alarm clock: tap “-” (correspond “☹” shortcut icon) to open/close alarm, display the alarm clock that has been set for 3 seconds when open; at the same time, the alarm indicator of the corresponding group lights up; turn off the alarm and the corresponding alarm indicator turns off.

2. Set alarm clock: long press “-”, enter alarm setting, distinguish 12/24H

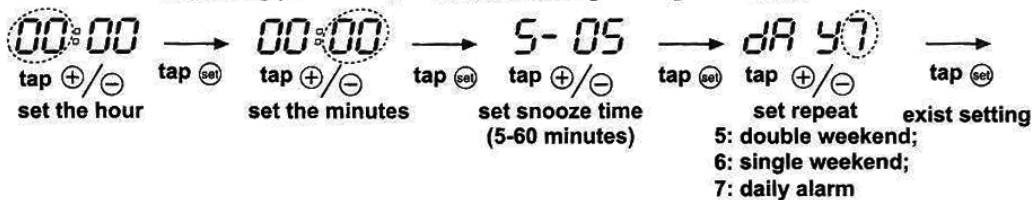

3. Start snooze:

when the alarm clock rings, tap any key to start snooze, alarm indicator light flashes slowly

4. Turn off the alarm:

when the alarm clock rings, long press any key to turn off alarm, enter the next alarm state